


Bulb Flats

Dimensions: EN 10067

Tolerances: EN 10067

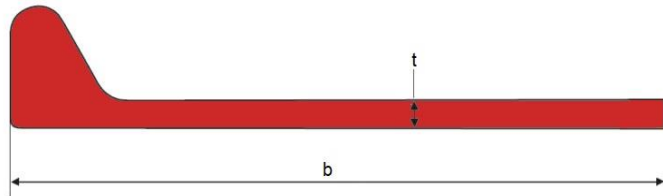

Size / mm	Weight Kgs/m	Width (b)	Thickness (t)
60 x 4	2,81	60	4
60 x 5	3,28	60	5
60 x 6	3,75	60	6
80 x 5	4,25	80	5
80 x 6	4,88	80	6
80 x 7	5,50	80	7
80 x 8	6,12	80	8
100 x 6	6,08	100	6
100 x 7	6,86	100	7
100 x 8	7,65	100	8
120 x 6	7,32	120	6
120 x 7	8,26	120	7
120 x 8	9,20	120	8
140 x 7	9,75	140	7
140 x 8	10,85	140	8
140 x 9	11,90	140	9
160 x 7	11,46	160	7
160 x 8	12,72	160	8
160 x 9	13,97	160	9
180 x 8	14,80	180	8
180 x 9	16,22	180	9
180 x 10	17,63	180	10
180 x 11	19,04	180	11
200 x 9	18,57	200	9
200 x 10	20,14	200	10
200 x 11	21,71	200	11
200 x 12	23,28	200	12
220 x 10	22,77	220	10
220 x 11	24,50	220	11
220 x 12	26,22	220	12

Size / mm	Weight Kgs/m	Width (b)	Thickness (t)
240 x 10	25,50	240	10
240 x 11	27,39	240	11
240 x 12	29,27	240	12
260 x 10	28,35	260	10
260 x 11	30,39	260	11
260 x 12	32,43	260	12
280 x 11	33,50	280	11
280 x 12	35,70	280	12
280 x 13	37,90	280	13
300 x 11	36,70	300	11
300 x 12	39,09	300	12
300 x 13	41,44	300	13
320 x 12	42,60	320	12
320 x 13	45,09	320	13
320 x 14	47,60	320	14
340 x 12	46,20	340	12
340 x 13	48,86	340	13
340 x 14	51,50	340	14
370 x 13	54,70	370	13
370 x 14	57,60	370	14
370 x 15	60,50	370	15
400 x 14	63,96	400	14
400 x 15	67,10	400	15
400 x 16	70,20	400	16
430 x 14	70,60	430	14
430 x 15	73,90	430	15
430 x 17	80,70	430	17
430 x 19	87,40	430	19
430 x 20	90,80	430	20

Upon customers request we can also arrange bulb flats in S + P (shot blasted and primed) condition.